


# Jet Needles

## PE, PWK (26mm-28mm) Needles

PART NUMBER  
SERIES MARK  
N 4 2 7 - 4 6

MARK	TAPER: A	L1	DIAMETER: D
A	1°00'	18.20	2.365
B	1°15'	18.65	2.375
C	1°34'	20.00	2.385
D	1°45'	20.45	2.395
E	2°00'	21.80	2.405
F	2°15'	22.25	2.415
G	2°26'	23.60	2.425
H	2°45'	24.05	2.435
J	3°00'	25.40	2.445
K	3°15'	25.85	2.455
L	3°33'	27.20	2.465
M	3°50'	27.65	2.475
N	4°00'	29.00	2.485
P			2.495
Q			2.505
R			2.515
S			2.525
T			2.535
U			2.545
V			2.555
W			2.565
X			2.575
Y			2.585
Z			2.595

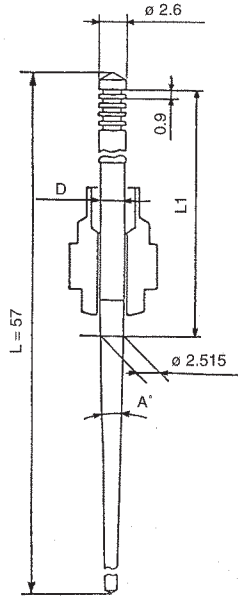

**NOTE:** Number 1 clip position is furthest from needle taper. The number after the three digits is clip position.

	TAPER		
	Leanest 3.00 degree	Standard 3.50 degree	Richer 3.75 degree
2 Clip position Leaner	N/A	LLQ-2	MLQ-2
Standard	JHQ-1	LLQ-4	MLQ-4
2 Clip position Richer	JHQ-3 JFQ-1	LGQ-2	MGQ-2
4 Clip position Richer	JHQ-5 JFQ-3	LGQ-4	MGQ-4
6 Clip position Richer	JFQ-5	N/A	N/A

Straight diameter: L (2.465mm)  
N (2.485mm)  
Q (2.505mm)  
S (2.525mm)

# Jet Needles

## PE (20mm-24mm) Needles

PART NUMBER  
SERIES MARK  
N 4 2 7 - 4 5

MARK	TAPER: A	L1	DIAMETER: D
A	1°00'	19.82	2.365
B	1°15'	21.17	2.375
C	1°34'	21.62	2.385
D	1°45'	22.97	2.395
E	2°00'	23.42	2.405
F	2°15'	24.77	2.415
G	2°26'	25.22	2.425
H	2°45'	26.57	2.435
J	3°00'	27.02	2.445
K	3°15'	28.37	2.455
L	3°33'	28.82	2.465
M	3°50'	30.17	2.475
N	4°00'	30.62	2.485
P			2.495
Q			2.505
R			2.515
S			2.525
T			2.535
U			2.545
V			2.555
W			2.565
X			2.575
Y			2.585
Z			2.595

